




HIGH SECURITY EXTERNAL SOUNDER & STROBE

REM-STR-65

Designed and engineered to provide maximum security in even the harshest of environments. The galvanized steel back plate and inner cover of the Odyssey 3 Metal combined with its additional outstanding features, ensure it is the complete external sounder solution.

Outstanding features:

- 115db Volume
- Inner Cover, Lid & Wall Tamper
- 1.5mm Galvanized Steel Enclosure
- Polycarbonate Cover & Lens
- IP65 Sealed Electronics
- Selectable SAB/SCB Mode
- Patented Safety Engineer Hold-off Mode
- Twin Alternating LEDs
- Advanced Microprocessor Technology
- Twin Tone: (Optional, 4 core cable required for twin tone)
- EN 50131-1 Grade 3
- Strobe Tube Saver
- Bi-Directional Sound

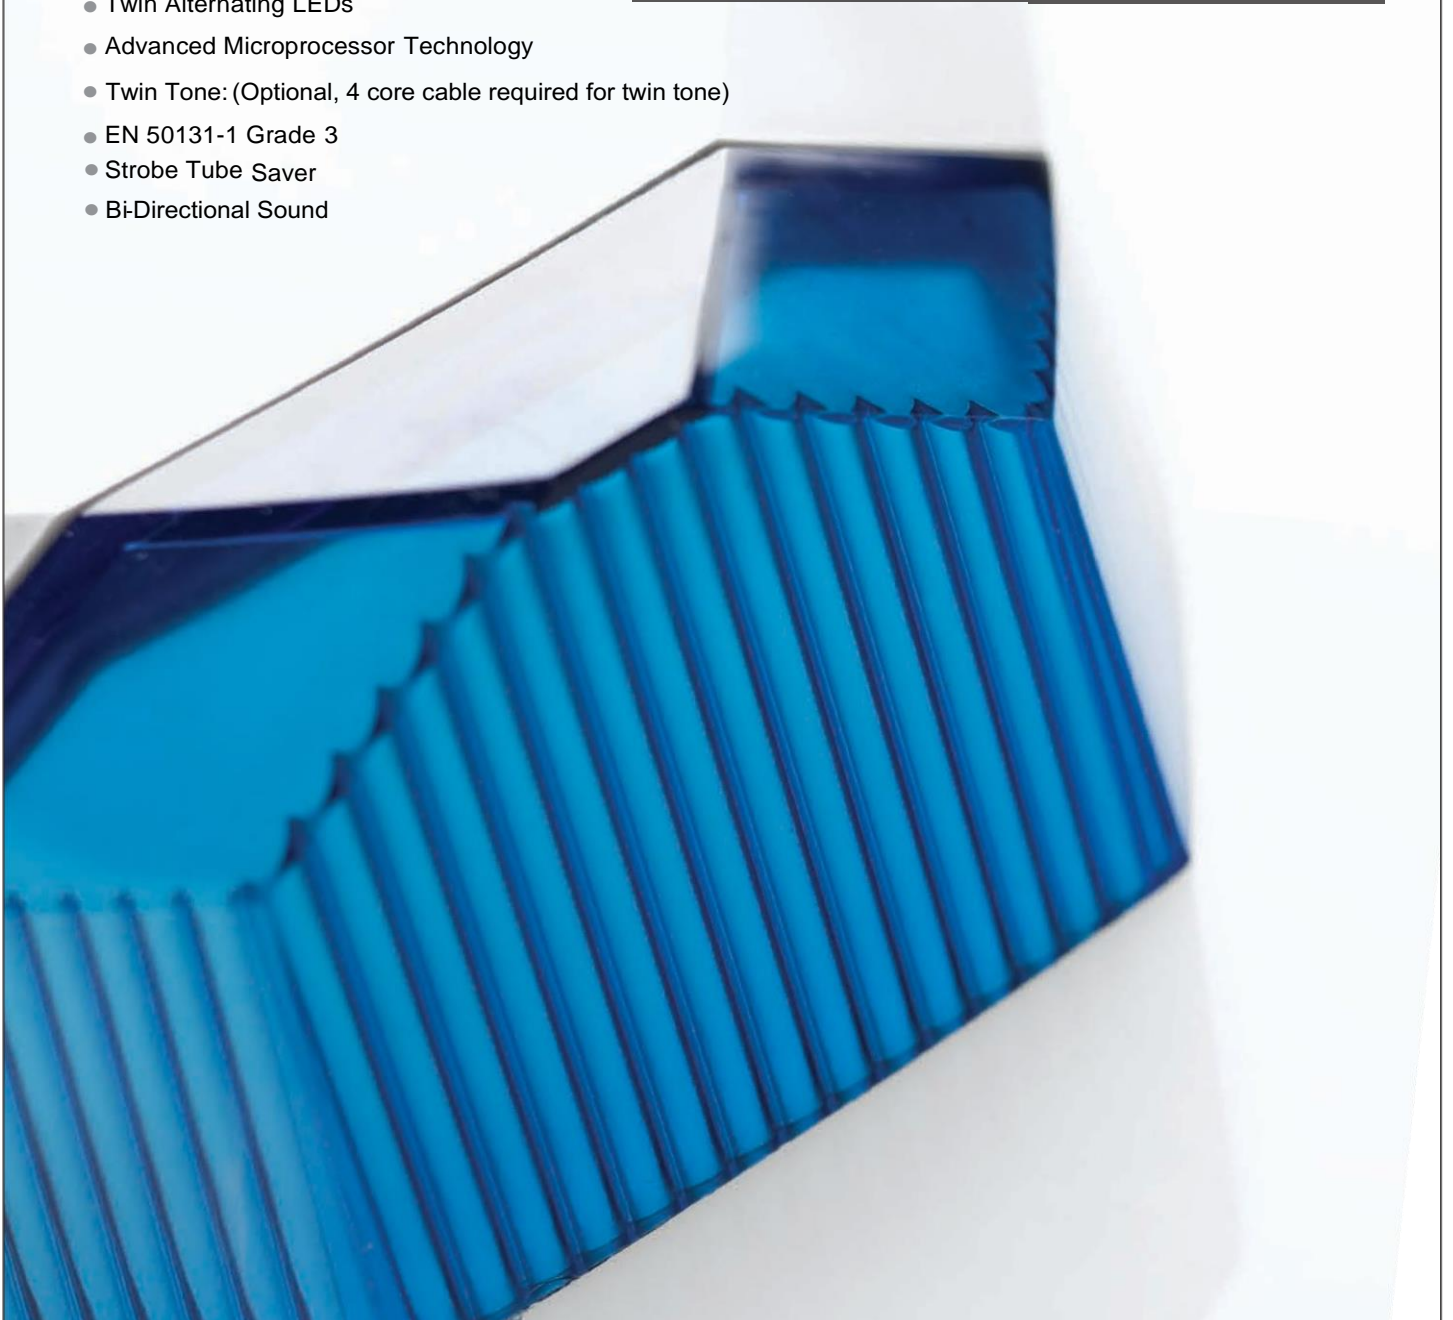

Galvanized Steel Assembly

Shielding the IP65 electronics module and twin piezo sounders the 1.5mm galvanized steel back plate and inner cover assembly provides maximum protection against tamper without compromising aesthetics.



Patented Engineer Hold-off Mode

Installation and maintenance is made quick, simple and safe by a revolutionary patented safety engineer hold-off mode. On power-up the hold-off mode is automatically enabled, preventing the unit from sounding until the tamper circuit is secure. This enables "one trips up the ladder" installation Hold-off mode can be re-invoked at any time from the control panel, ensuring easy maintenance and verification.



IP65 Sealed Electronics Module

The advanced electronic module of the Odyssey 3 Metal is protected by a robust inner cover assembly with gasket seal. This maximizes protection from dust and moisture, sealing to IP65 rating which enables prolonged exposure to harsher environments without compromising performance or functionality.



Triple Tamper Detection

Inner cover, lid and wall tamper detection is provided as standard. Wall tamper is derived from a fixing screw location, removing the need to drill additional fixing holes and providing optimum reliability.

Specifications

Supply Voltage:	13.7V (nominal)
Current Drain	
Quiescent (inc charging):	15mA
Strobe:	100mA
Sounder:	425mA
Battery:	NiMh Stack, 7.2VDC, 320mAh
Strobe:	1W, 1Hz Flash Rate
Dimensions:	315mm x 306mm x 78mm
Packed Weight:	3000g (106z) approx.

European Standards

Safety: Conforms to European Union (EU) Low Voltage Directive (LVD) 73/23/EEC (amended by 93/68/EEC).

EMC: Conforms to European Union (EU) Electro-Magnetic Compatibility (EMC) Directive 89/336/EEC (amended by 92/31/EEC and 93/68/EEC).

Approved to BS EN 55022 Class B and BS EN 50130-4: 1996.

PD 6662 & EN 50131-1 Grade 3 Environmental Class IV.

The CE mark indicates that this product complies with the European requirements for safety, health, environmental and customer protection.



Certificate Number: FM 35285



**Plot No:-490, 2nd floor, Patparganj Industrial Area New Delhi-110092 for More Details Please
Visit: www.remconsecurity.com Email: info@remconsecurity.com Contact No.: +91-9910048363**

DISCLAIMER: Specifications are subject to change without notice. Offer strobe is OEM module of Texecom. OEM reserves the right to make changes to improve performance without impacting form, fit or function. Remcon India has OEM Tie-up with them for offering packaged set. Other trademarks are property of their respective owners.